



Repeats Not Shown to Scale.

Cinema

Meets or exceeds all ACT® Standards

Crypton Seating Fabric
FR Free – Compliant with CAL AB 2998
PFAS Free



*ACT® Registered Certification Marks



Fabric Specifications

Content	100% Polyester
Finish	Crypton®
Backing	Crypton®
Weight	20.4
Width	54"
Roll Size	50 yards
Ends/Picks	145/50
Repeat	H 13.44" V 13.50"
Directional	Yes
Railroaded	No

Additional Attributes

FR Free	Yes
PFAS Free	Yes

Certifications

Greenguard Gold Certified	Yes - Crypton Technology is Greenguard Gold Certified
---------------------------	---

Recommended Cleaning

Please refer to Detailed Cleaning Instructions

* Cleaning information is offered for general guidance and is not a guarantee. The use of certain cleaning agents can be harmful to the surface appearance and lifespan of a product. Burch Fabrics assumes no responsibility for damage to a product resulting from lack of cleaning, improper cleaning or the misuse of cleaning agents. Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to materials and cause permanent damage. Burch Fabrics cannot be held responsible for dye transfer caused by external contaminants.

Performance Characteristics

Abrasion Resistance ASTM D4157	75,000 * double rubs
Brush Pill ASTM D3511	Class 5
Tensile Strength ASTM D5034	Warp: 304.3 lbs Fill: 242.9 lbs.
Tear Strength ASTM D2261	Warp: 55.2 lbs. Fill: 44.0 lbs.
Seam Slippage ASTM D4034	Warp: 72.1 lbs. Fill: 107.5 lbs.
Colorfastness to Crocking AATCC 8	Dry: 4.0 Wet: 4.5
Colorfastness to Light AATCC 16	40 Hours Class 4

Flammability**


CAL TB 117-2013	Passes
NFPA 260	Class 1
UFAC	Class 1

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.

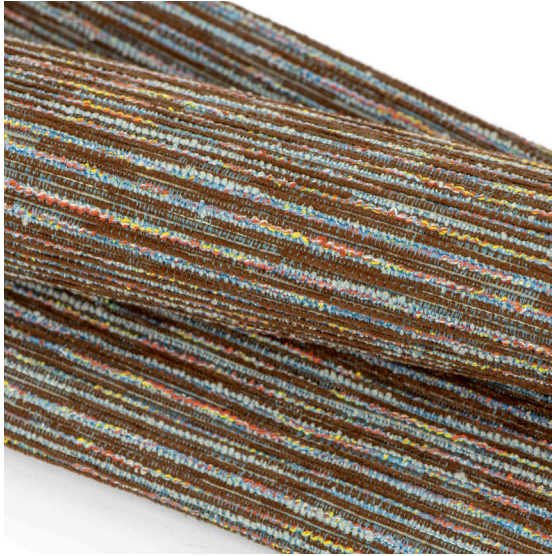

Repeats Not Shown to Scale.

Intermission

Meets or exceeds all ACT® Standards

Crypton Seating Fabric

FR Free – Compliant with CAL AB 2998

PFAS Free



*ACT® Registered Certification Marks



Fabric Specifications

Content	100% Polyester
Finish	Crypton®
Backing	Crypton®
Weight	22.1
Width	54"
Roll Size	50 yards
Ends/Picks	145/22
Repeat	H 13.6" V 4.50"
Directional	Yes
Railroaded	No

Additional Attributes

FR Free	Yes
PFAS Free	Yes

Certifications

Greenguard Gold Certified	Yes - Crypton Technology is Greenguard Gold Certified
---------------------------	---

Recommended Cleaning

Please refer to Detailed Cleaning Instructions

* Cleaning information is offered for general guidance and is not a guarantee. The use of certain cleaning agents can be harmful to the surface appearance and lifespan of a product. Burch Fabrics assumes no responsibility for damage to a product resulting from lack of cleaning, improper cleaning or the misuse of cleaning agents. Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to materials and cause permanent damage. Burch Fabrics cannot be held responsible for dye transfer caused by external contaminants.

Performance Characteristics

Abrasion Resistance ASTM D4157	75,000 * double rubs
Brush Pill ASTM D3511	Class 3.5
Tensile Strength ASTM D5034	Warp: 234.2 lbs Fill: 119.0 lbs.
Tear Strength ASTM D2261	Warp: 51.0 lbs. Fill: 25.1 lbs.
Seam Slippage ASTM D4034	Warp: 43.5 lbs. Fill: 33.5 lbs.
Colorfastness to Crocking AATCC 8	Dry: 4.5 Wet: 4.5
Colorfastness to Light AATCC 16	40 Hours Class 4

Flammability**

CAL TB 117-2013	Passes
NFPA 260	Class 1
UFAC	Class 1

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.



Repeats Not Shown to Scale.

Mezzanine

Meets or exceeds all ACT® Standards

Crypton Seating Fabric

FR Free – Compliant with CAL AB 2998

PFAS Free



*ACT® Registered Certification Marks



Fabric Specifications

Content	100% Polyester
Finish	Crypton®
Backing	Crypton®
Weight	18.8
Width	54"
Roll Size	50 yards
Ends/Picks	145/32
Repeat	H 4.5" V 5.4"
Directional	Yes
Railroaded	No

Additional Attributes

FR Free	Yes
PFAS Free	Yes

Certifications

Greenguard Gold Certified	Yes - Crypton Technology is Greenguard Gold Certified
---------------------------	---

Recommended Cleaning

Please refer to Detailed Cleaning Instructions

* Cleaning information is offered for general guidance and is not a guarantee. The use of certain cleaning agents can be harmful to the surface appearance and lifespan of a product. Burch Fabrics assumes no responsibility for damage to a product resulting from lack of cleaning, improper cleaning or the misuse of cleaning agents. Certain clothing and accessory dyes (such as those used on denim jeans) may migrate to materials and cause permanent damage. Burch Fabrics cannot be held responsible for dye transfer caused by external contaminants.

Performance Characteristics

Abrasion Resistance ASTM D4157	95,000 * double rubs
Brush Pill ASTM D3511	Class 4
Tensile Strength ASTM D5034	Warp: 272.5 lbs Fill: 169.6 lbs.
Tear Strength ASTM D2261	Warp: 47.5 lbs. Fill: 30.1 lbs.
Seam Slippage ASTM D4034	Warp: 96.8 lbs. Fill: 64.4 lbs.
Colorfastness to Crocking AATCC 8	Dry: 4.5 Wet: 4.5
Colorfastness to Light AATCC 16	40 Hours Class 4

Flammability**

CAL TB 117-2013	Passes
NFPA 260	Class 1
UFAC	Class 1

Although we try hard to make sure colors on our site are accurate, actual colors may vary. Please order samples prior to making a purchase.

Final determination of the suitability of this product for an application rests with the user.

* Abrasion test results exceeding ACT Performance Guidelines are not an indicator of product lifespan. Multiple factors affect fabric durability and appearance retention.

** This term and any corresponding data refer to the typical performance in the specific tests indicated and should not be construed to imply the behavior of this or any other material under actual fire conditions.